




MCS-REMOTE-SI-BASE

Description & Specifications

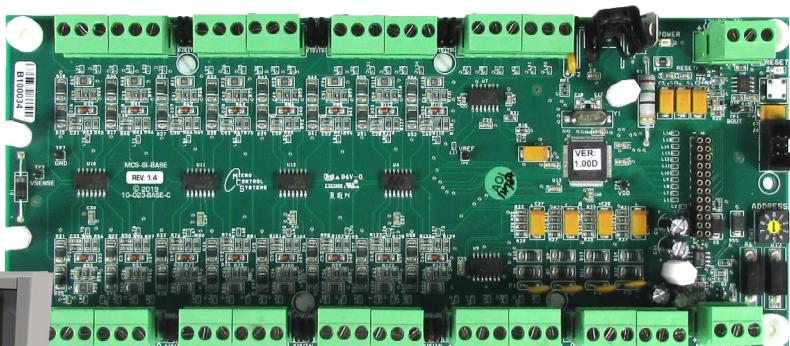

Part # MCS-REMOTE-SI-BASE

Description

The **MCS-REMOTE-SI-BASE** provides a flexible and cost effective way to allow remote expansion for the **MCS-MAGNUM**. Because communication is over a RS-485 long distance two-wire differential network transmission system, the enclosure can be located up to 5,000 feet away. Each MCS-SI-BASE has a stand-alone microprocessor which communicates with a MCS-MAGNUM over the MCS-I/O port at 38,400 baud. All data is check summed with auto error correction.

The printed circuit board is a four layer board with a separate power and ground plane to provide the ultimate in efficient electrical noise suppression. This coupled with noise suppression circuitry makes the MCS-SI-BASE virtually impervious to electrical noise.

The MCS-SI-BASE provides sixteen sensor inputs. The inputs are universal and support either a digital or analog input signal. The MCS-SI-BASE also provides four analog outputs that provide independent dc voltage outputs from 0 to 10vdc. However, these analog outputs can only be controlled by the MCS-MAGNUM micro controllers running version 8 or higher software.

Each input and output consists of a three position removable terminal block, providing +5vdc, ground and signal in. A polyfuse protects the +5vdc line from shorted sensors. The terminal blocks provide screw connections which eliminate the need for sta-cons. Because the terminal blocks are removable, board replacement requires no wires to be removed.

Specifications

Small Enclosure-NEMA rating - Type 1

- Flush slotted latch operated with a screwdriver
- Butt hinges
- Mounting holes on back of enclosure
- 16 gauge steel
- FINISH - ANSI 61 gray polyester powder paint finish inside and out over pretreated surfaces

Dimensions..... 14" L, 12" W, 4" D

Mounting Holes..... Mounts with four pre-drilled holes

Controller

Dimensions..... 10.87" L, 4.00" W, 2.50" H

Mounting Holes..... 4 holes using #6 screws through nylon collars at corners of board

Cover..... Lexan with standoffs

Operating Temperature..... -40°F to +158°F (-40°C to +70°C)

Operating Humidity..... 0-95% Non-Condensing

Storage Temperature..... -40°F to +158°F (-40°C to +70°C)

Microprocessor..... Microchip 16-bit PIC processor

Sensor Inputs (SI)..... 16 inputs 0-5vdc (10-bit A/D)

Analog Outputs (AO)..... 4 outputs 0-10vdc

Printed Circuit Board..... Four layer with separate power and ground planes

Input Power (Standard)..... 90W 12VDC Enclosed
Switching Power Supply

MCS-I/O Comm Port..... 1 @ 38,400 baud

Power Detection..... Automatic power fail reset

Revision - 2021-03-19